

## Piranha SLASHERS





Ben Wye Engineering has a full range of Piranha Slashers in three point linkage or trailed models ranging from 1mtr (3ft) to multi rotor models up to and over 5mtr (17ft).


Our Piranha Slashers can be centrally mounted or off set for mowing down fence lines and out side the wheel line, a double headstock gives the best of both worlds allowing pick up in either position and for precision control a hydraulic side shift is an extra on some models.

Triangular profile telescopic PTO shafts are the input drive line of the Piranha Slashers with a range of drives between multi-rotor heads including Ben Wye Engineering's own Cone ring coupler with cushioning rubbers to dampen shock loads with a positive drive. Protection for the drive line consists of either a two, four or six plate friction slip clutch depending on the HP required.

Our gearboxes start at 30kw (40HP) through to the 97KW (130HP). The nodular cast iron gearbox housings use hardened and precision ground shafts to drive the precision cut, case hardened gears made from high grade alloy steel forgings and all this is rotated with taper roller bearings (40HP unit uses ball bearings). The output shafts use a tapered spline assembly with an incorporated seal protecting system on the spindle hub.

Standard optional extras include Rollers [front or rear], Rear castor wheels, Chain curtains, Knapsack holder, Spray units Front mount units, side discharge or rear discharge of mulch, Pneumatic or Solid wheels and fixed cutting height or adjustable sides for varied cutting.

- Full Range, Models from 1m to 5m
- · Single, Twin, Triple or Quad Rotors
- · Twin Side or Rear Delivery
- Single or double Blade Mulching Models
- · Flat Deck, Winged or Drop Centre
- · Proudly Australian Owned & Made

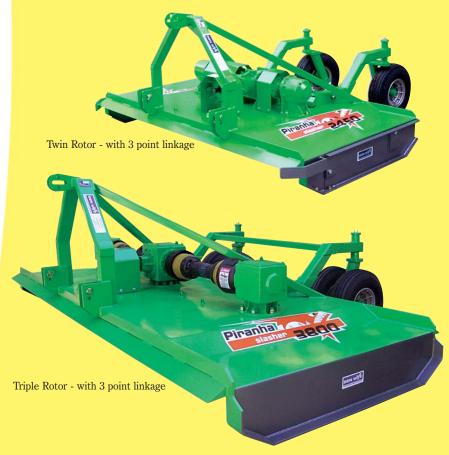

YOUR DEALER



BEN WYE ENGINEERING & DESIGN PTY LTD Collins Rd, Summertown SA 5142 ACN 085 257 327 Tel: (08) 8390 3664 Fax: (08) 8390 3971 sales@benwye.com.au

