



# POWER PROP

**BUILT FOR EVERY ORCHARD. CONFIGURED FOR EVERY CHALLENGE**



### SCAN QR CODE TO LEARN MORE

Scan to contact your nearest Grower Services dealership for pricing, availability, and expert advice on the Interlink Power Tube range.

Request a quote and speak with the team about the best sprayer setup for your operation.

**SEE OTHER SIDE FOR SPECIFICATIONS AND ADDITIONAL INFORMATION**

# INTERLINK

ULTIMATE CROP PROTECTION

# POWER PROP



## TOTAL AIR DISPLACEMENT

Complete leaf coverage with advanced air displacement, **194,000m<sup>3</sup>/hr** airflow, and **48W** fan power with **6 fans**.




## TAILORED FAN POSITIONING

Fans are mounted on **planar joints**, allowing **adjustable spray angles** for **precise and targeted crop coverage** at any growth stage.




TRUSTED BY OVER  
**1000+**  
**FARMERS**  
IN AUSTRALIA

## TECHNOLOGY IN DETAIL

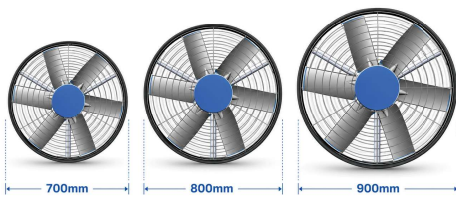


### CUSTOM FAN CONFIGURATIONS

Available in **700mm, 800mm, and 900mm fan sizes** with **4, 6, 8, or 10 fan layouts** for powerful, targeted coverage across a wide range of crops and canopy types.

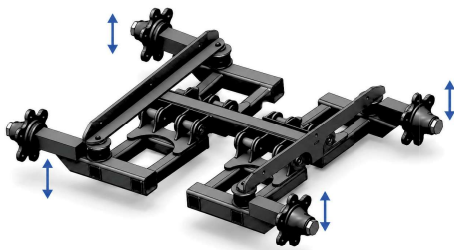

### SUSPENSION AXLE SYSTEM

**Heavy-duty 2 or 4-wheel independent suspension axle** fitted with **fully sealed 70mm stub axles** for superior stability and smooth towing performance.

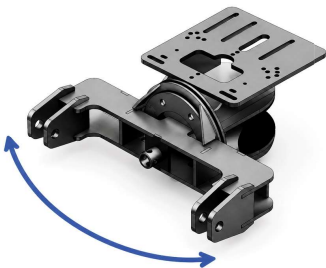


### 2-POINT TOW HITCH

**Heavy-duty twin tow hitch** featuring durable **nylon pivot points, 30° lockout**, and up to **110° turning** for exceptional stability and manoeuvrability.

## POWER PROP OVERVIEW


APPLICATION TYPE:	Orchard
TANK SIZES:	4000-7000L
HITCH TYPE:	2-Point Tow Hitch
FRAME CONSTRUCTION:	Triple Coated Luxathane
AXLE TYPE:	Suspension Axle
WHEELS SIZE:	400-60-15.5
PUMP TYPE/SIZE:	Catterin CPK250 250L Pump
WATER SECTIONS:	Depends on Build
JET TYPE:	ALBUZ 60° Hollow Cone Jets
FAN SIZES:	700 - 900mm Fans
FAN LAYOUTS:	4 - 10 Fan Total
HEIGHT ADJUST:	12 - 18" (304.8 - 457.2mm)
COMPUTER/CONTROLLER:	ARAG Bravo 180s
<b>*OPTIONAL ELECTROSTATIC TECHNOLOGY*</b>	
<b>*MINIMUM PTO REQUIREMENT DEPENDS ON BUILD*</b>	

### PARALLELOGRAM

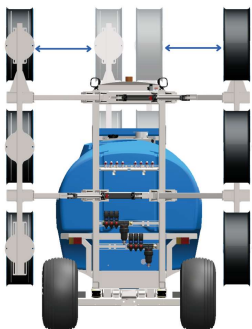

Fans hydraulically swing outward on **dual parallel-link arms**, providing **consistent spray alignment** and **adjustable coverage** for wider rows and early-stage crop growth.

### LAY-OVER

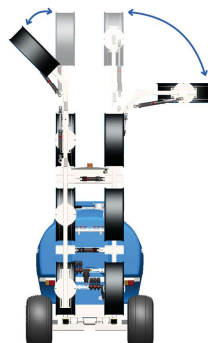

Fans hydraulically raise upward for **efficient coverage of tall crops**, then fold neatly onto a **support bar** for **compact transport and easy storage**.

### LAY-DOWN



Fans hydraulically angle over the crop, delivering spray from **above and through the canopy** for **improved penetration** in **small to medium-sized crops**.

**FOR CONTACT DETAILS, PLEASE SCAN THE QR CODE ON THE REVERSE SIDE**